

## Fluxgate Closed Loop Current Sensor CYFGCS300LDGH

CYFGCS300LDGH is a current sensor based on the fluxgate closed-loop principle, and can be used for measuring DC, AC, pulse and various irregular waveform currents under galvanic isolation conditions. It has ultra-high accuracy and linearity, ultra-high sensitivity and resolution, very low out-of-phase current and temperature drift. It is widely used in instrumentation, medical equipment, metrology and calibration, laboratories, high-precision power supplies, new energy vehicles and so on.

### Features


- High electrical isolation
- High linearity, high accuracy
- High reliability
- Good overload capability
- Small sizes
- Insulated plastic case recognized according to UL94-V0
- Very good property-price ratio

### Applications


- Battery supplied applications
- Uninterruptible power supplies (UPS)
- Variable speed drives
- Welding machine
- Electric power network monitoring
- AC frequency conversion servo-motors
- Electrochemical applications

### Technical Data

Parameters	Symbol	Values		Unit
Part number		CYFGCS200LDGH	CYFGCS300LDGH	
Rated input current	$I_{PN}$	200	300	A
Current Measurement Range	$I_P$	0~±440 (±15V, 10Ω)	0~±440 (±15V, 10Ω)	A
Rated output current	$I_{OUT}$	100	150	mA
Turns ratio	$K_N$	1:2000	1:2000	
Measuring resistance (at rated input current)	$R_M$	( $V_C=±12V$ ) 0-47 ( $V_C=±15V$ ) 0-77	( $V_C=±12V$ ) 0-21 ( $V_C=±15V$ ) 0-40	Ω
Supply Voltage	$V_C$	±12~±15(±5%)		V
Current consumption	$I_C$	±20+ $I_{OUT}$		mA
Isolation voltage	$V_d$	5kVrms/50Hz/1min, primary and secondary circuits		
Linearity	$\epsilon_L$	<0.02		%FS
Accuracy ( $T_A=25^\circ C$ )	X	<0.05		%FS
Zero point offset current	$I_0$	$T_A=25^\circ C$	<±10	uA
Thermal drift of offset current	$I_{OT}$	$T_A=-40\sim+85^\circ C$	<±10	uA
Following accuracy di/dt	di/dt	>100		A/μs
Response time	$T_r$	<1		μs
Bandwidth(-3dB)	f	DC~100		kHz
Operating temperature	$T_A$	-40~+85		°C
Storage temperature	$T_S$	-45~+100		°C
Internal resistance of secondary coil ( $T_A=25^\circ C$ )	$R_S$	48		Ω
Mass	m	110		g
Used standard		Q/320115QHKJ01-2016		




## Case Style and Connection

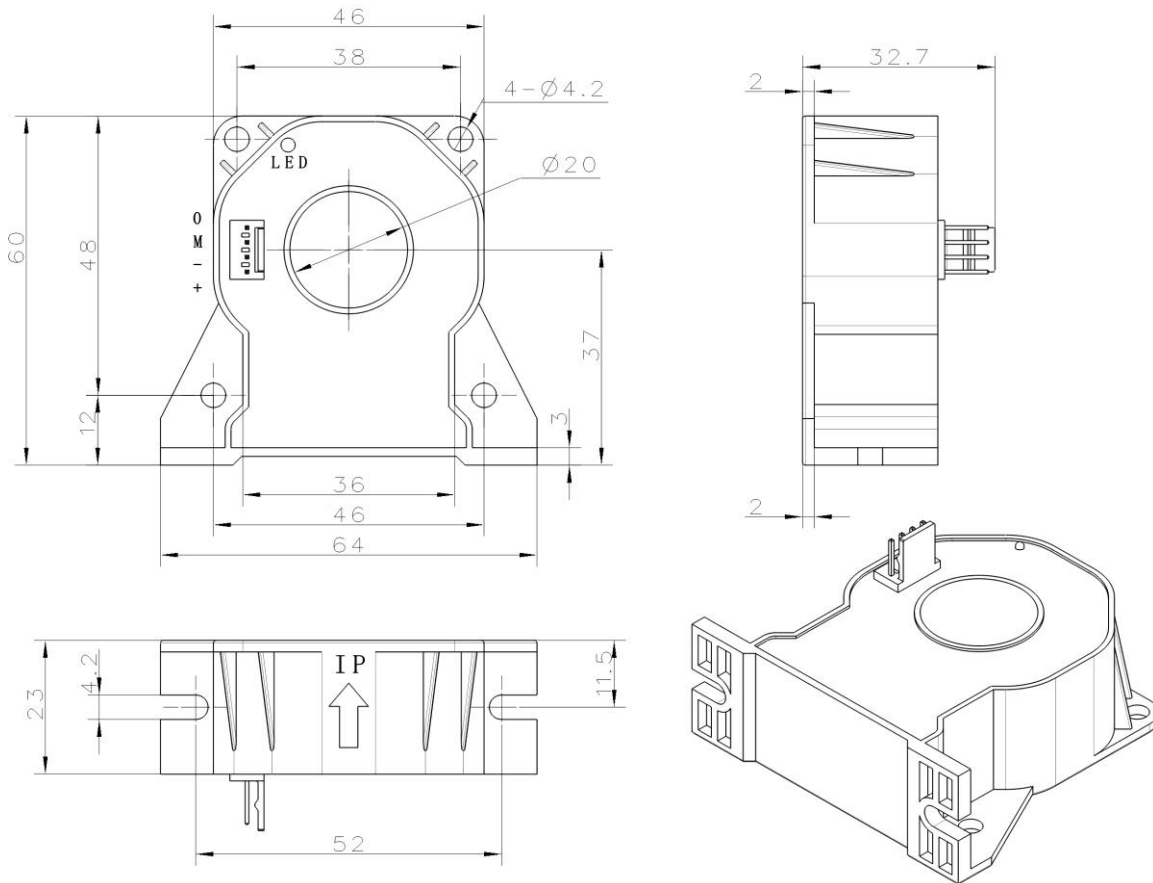

### Pin arrangement:

+: +15V  
-: -15V  
M:  $V_{OUT}$   
O: 0V (power ground)

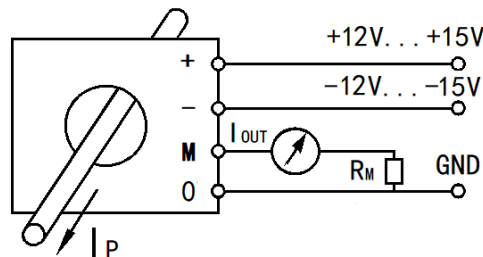

### Application Note

1. Incorrect wiring may cause damage to the sensor. After the sensor is powered on, the same-phase voltage value can be measured at the output terminal when the measured current passes through the sensor in the direction of the arrow.
2. Under normal operating conditions, the active indicator is always on. If the indicator is off, it means that the current sensor is in a non-zero flux state, such as the bus current exceeds the measuring range. In this case, the sensor internal system runs in scanning state, the output current is no longer proportional to the input current signal, once the bus current back down to within the current range, the sensor is back to normal operation.
3. Measuring resistance refers to the measurement of DC current. If measuring AC current, the measuring resistance is reduced to 70%.
4. The temperature of the primary measuring wire or copper rod should not exceed 100°C.