

Closed Loop Hall AC/DC Current Sensor CYHCS-D8-X

This Hall Effect current sensor is based on closed loop compensating principle and designed with a high galvanic isolation between primary conductor and secondary circuit. It can be used for measurement of DC and AC current, pulse currents etc. The output of the transducer reflects the real wave of the current carrying conductor.

Product Characteristics	Applications
<ul style="list-style-type: none">• Excellent accuracy• Very good linearity• Various kinds of output signals• Window structure and encapsulated• Large current measuring range• High current overload capability	<ul style="list-style-type: none">• Photovoltaic equipment• General Purpose Inverters• AC/DC Variable Speed Drivers• Battery Supplied Applications• Uninterruptible Power Supplies• Switched Mode Power Supplies

ELECTRICAL DATA


Part number	CYHCS-D8-100A-X	CYHCS-D8-250A-X	CYHCS-D8-500A-X	CYHCS-D8-1000A-X
Nominal input current	100A	250A	500A	1000A
Measuring range	0~±200A	0~±500A	0~±1000A	0-2000A
Turns ratio	1:5000			
Internal sampling resistance	≤60Ω±0.1%	≤50Ω±0.1%	≤25Ω±0.1%	≤5Ω±0.1%
Nominal output signal	X=20mA (0~±20mA); X=4V (0~±4V); X=5V (0~±5V)			
Supply voltage	±15VDC ~ ±24VDC			
Current consumption	≤30mA + Input current / 5000			
Galvanic isolation	6KV, 50Hz, 1min			

ACCURACY DYNAMIC PERFORMANCE



Zero offset current Ta=25°C	< ±0.04mA
Magnetic Offset current IP→0	< ±0.02mA
Thermal drift of offset current	IP=0, Ta=-25°C ~ +85°C, ±0.2mA
Response time	<2μs
Accuracy at +25°C	±0.5% for rated current 100A~1000A
Linearity	± 0.1% for rated current 100A~1000A
Bandwidth(-3dB)	DC...150kHz
di/dt following speed	>100A/μs

GENERAL DATA

Operating temperature	-25°C ~ +85°C
Storage temperature	-40°C ~ +100°C
Unit weight	510g




Dimensions (mm)

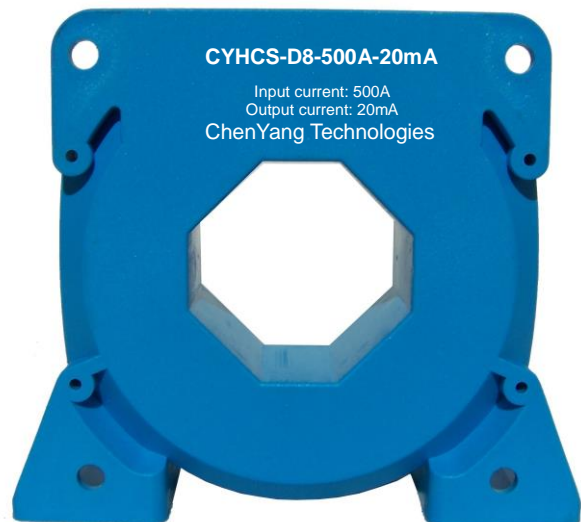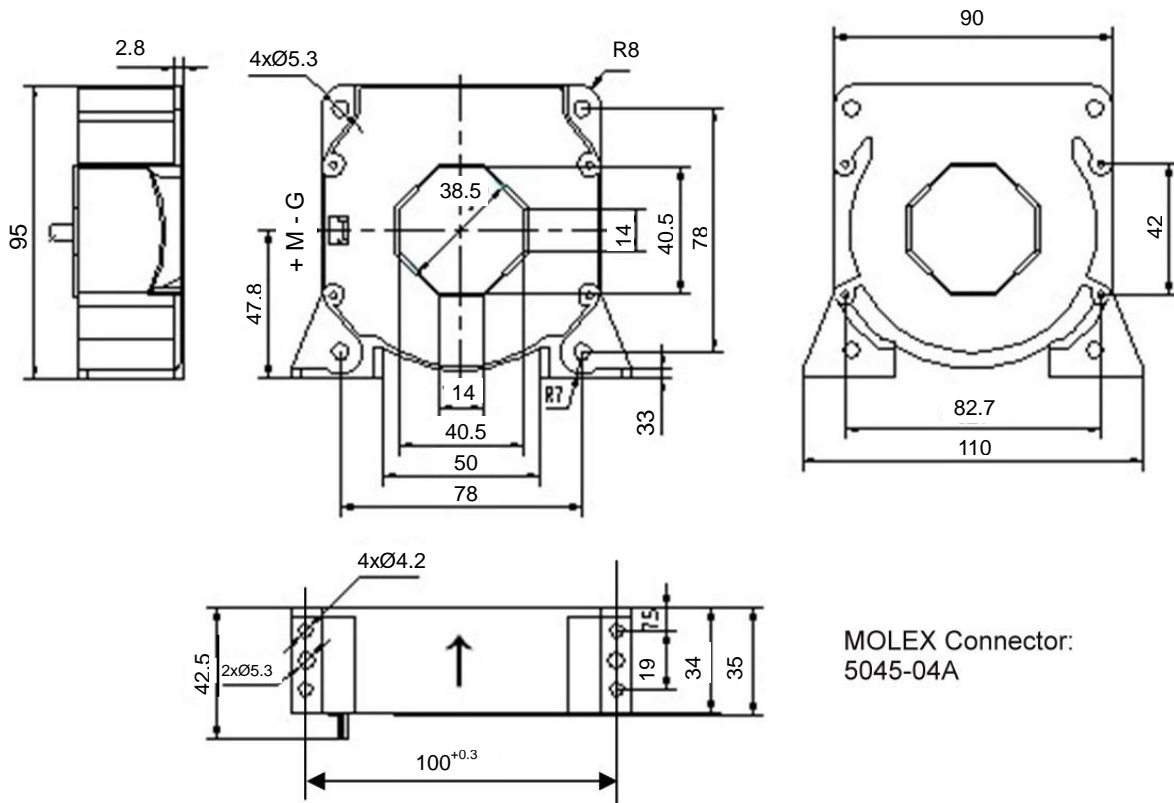

Pin Definition:


+ V+: +15~+24VDC
M: Output signal

- V-: -15~ -24VDC
G: ground




Sensor Connections

1) Current Output

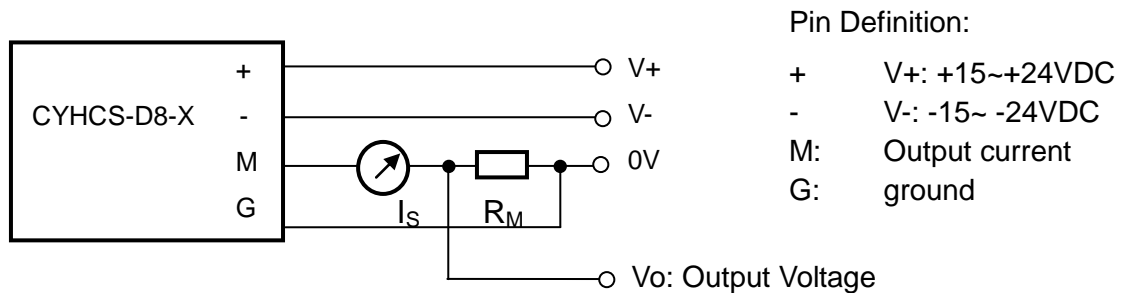

Measuring resistance $R_M = 10\Omega \sim 100\Omega$

2) Voltage Output

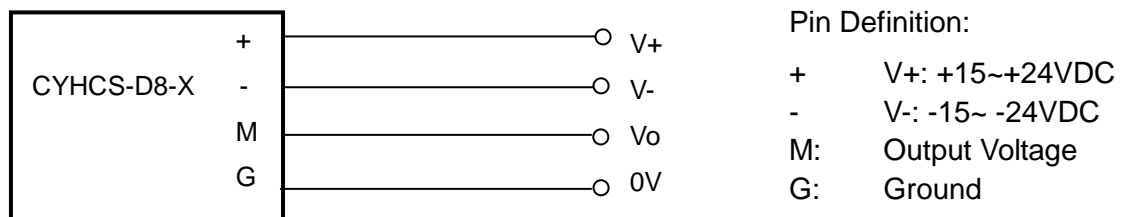

Operating instructions

1. Connect the terminals of power source, output respectively and correctly, never make wrong connection for DC current.
2. Temperature of the primary conductor should not exceed 100 °C.
3. Dynamic performances (di/dt and the response time) are the best with a single bar completely filling the primary hole.
4. In order to achieve the best magnetic coupling, the primary windings have to be wound over the top edge of the device.