

## Split Core Hall Current Sensor CYHCT-EKCV

This Hall Effect current sensor is based on open loop principle and designed with a high galvanic isolation between primary conductor and secondary circuit. It can be used for measurement of DC current, DC pulse currents etc. The output of the transducer reflects the real wave of the current carrying conductor.

Product Characteristics	Applications
<ul style="list-style-type: none"> <li>• Excellent accuracy</li> <li>• Very good linearity</li> <li>• Using split cores and easy mounting</li> <li>• Less power consumption</li> <li>• Window structure</li> <li>• Electrically isolating the output of the transducer from the current carrying conductor</li> <li>• No insertion loss</li> <li>• Current overload capability</li> </ul>	<ul style="list-style-type: none"> <li>• <b>Photovoltaic equipment</b></li> <li>• Frequency conversion timing equipment</li> <li>• Various power supply</li> <li>• Uninterruptible power supplies (UPS)</li> <li>• Electric welding machines</li> <li>• Transformer substation</li> <li>• Numerical controlled machine tools</li> <li>• Electric powered locomotive</li> <li>• Microcomputer monitoring</li> <li>• Electric power network monitoring</li> </ul>

### Electrical Data


Primary Nominal DC Current $I_r$ (A)	Measuring Range (A)	DC Output Voltage (V)	Aperture Diameter (mm)	Part number (see application notes on page 3)
30A	0 ~ ± 30A	x=0: 0-4V ±1.0% x=3: 0-5V ±1.0% x=8: 0-10V ±1.0%	12	CYHCT-EKCV-U/B30A-xn
50A	0 ~ ± 50A			CYHCT-EKCV-U/B50A-xn
80A	0 ~ ± 80A			CYHCT-EKCV-U/B80A-xn
100A	0 ~ ± 100A			CYHCT-EKCV-U/B100A-xn
200A	0 ~ ± 200A			CYHCT-EKCV-U/B200A-xn
300A	0 ~ ± 300A			CYHCT-EKCV-U/B300A-xn

(n=2,  $V_{cc}$ = +12VDC; n=3,  $V_{cc}$  =+15VDC; n=4,  $V_{cc}$  =+24VDC, U: unidirectional input current; B: bidirectional input current, please give U or B in Part number)

Supply Voltage	$V_{cc}$ = +12V, +15V, +24VDC ± 5%
Output Voltage at $I_r$ , $T_A=25^\circ\text{C}$ :	$V_{out}$ =0- 4V, 0-5V, 0-10VDC
Current Consumption	$I_c$ < 25mA
Galvanic isolation, 50/60Hz, 1min:	3kV rms
Output Impedance:	$R_{out}$ < 150Ω
Load resistance:	10kΩ

### Accuracy and Dynamic performance data

Accuracy at $I_r$ , $T_A=25^\circ\text{C}$ ,	$X$ <±1.0% FS
Linearity from 0 to $I_r$ , $T_A=25^\circ\text{C}$ ,	$E_L$ <±0.5% FS
Electric Offset Voltage, $T_A=25^\circ\text{C}$ ,	$V_{oe}$ <50mV
Magnetic Offset Voltage ( $I_r \rightarrow 0$ )	$V_{om}$ <±20mV
Thermal Drift of Offset Voltage,	$V_{ot}$ <±1.0mV/°C
Response Time at 90% of $I_P$ ( $f=1\text{kHz}$ )	$t_r$ < 1ms
Frequency Bandwidth (-3dB),	$f_b$ = DC - 20 kHz
Case Material:	PBT





## General Data

Operating Temperature,  
Storage Temperature,  
Unit weight:

$T_A = -25^{\circ}\text{C} \sim +85^{\circ}\text{C}$   
 $T_S = -40^{\circ}\text{C} \sim +100^{\circ}\text{C}$   
35g/unit

## Dimensions

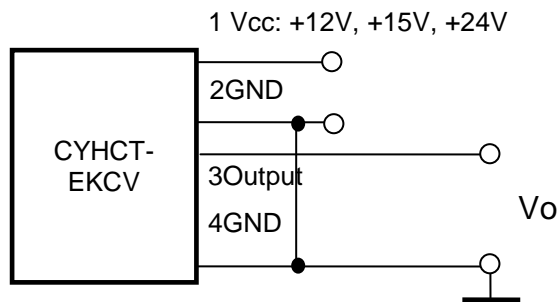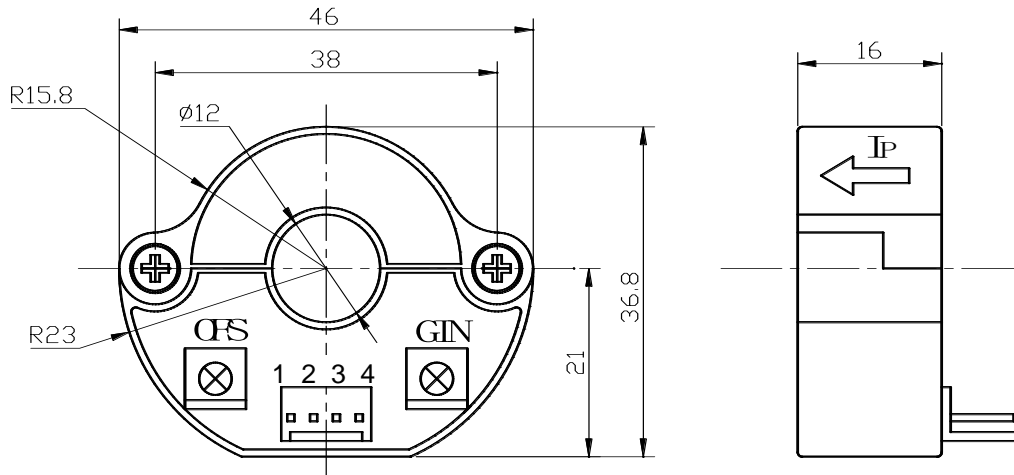

## Pin Arrangement


1: Vcc      2: Ground (GND)      3: Output      4: Ground (GND)

GIN: gain adjustment

OFS: offset adjustment

## Notes:

1. Connect the terminals of power source, output respectively and correctly, never make wrong connection.
2. Two potentiometers can be adjusted, only if necessary, by turning slowly to the required accuracy with a small screwdriver.
3. The best accuracy can be achieved when the window is fully filled with bus-bar (current carrying conductor).
4. The in-phase output can be obtained when the direction of current of current carrying conductor is the same as the direction of arrow marked on the transducer.



## Application Notes

### 1) Part number CYHCT-EKCV-U/BxxxA-xn

**U:** unidirectional input current; **B:** bidirectional input current; **xxx:** current value; **x:** output voltage (**x=0:** 0-4V  $\pm 1.0\%$ ; **x=3:** 0-5V  $\pm 1.0\%$ ; **x=8:** 0-10V  $\pm 1.0\%$ ); **n:** power supply (**n=2,** Vcc= +12VDC; **n=3,** Vcc =+15VDC; **n=4,** Vcc =+24VDC,)

**Example 1:** CYHCT-EKCV-U100A-32 Hall Effect DC Current sensor with  
Output signal: 0 – 5V DC  
Power supply: +12V DC  
Rated input current: 0 - 100A DC (unidirectional)

**Example 2:** CYHCT-EKCV-B100A-84 Hall Effect DC Current sensor with  
Output signal: 0 – 10V DC  
Power supply: +24V DC  
Rated input current: -100A - 0 - +100A DC (bidirectional)

### 2) Relation between Input current and output signal

Current Sensor CYHCT-EKCV-U100A-32	
Input current (A)	Output voltage Vo (V)
0	0
25	1.25
50	2.5
75	3.75
100	5

Current Sensor CYHCT-EKCV-B100A-84	
Input current (A)	Output voltage Vo (V)
-100	0
-75	1.25
-50	2.5
-25	3.75
0	5
25	6.25
50	7.5
75	8.75
100	10